
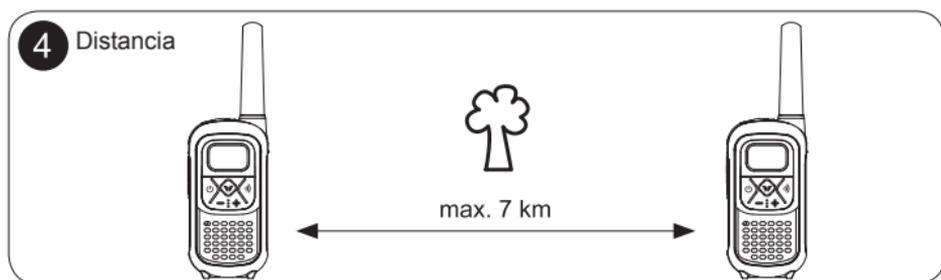
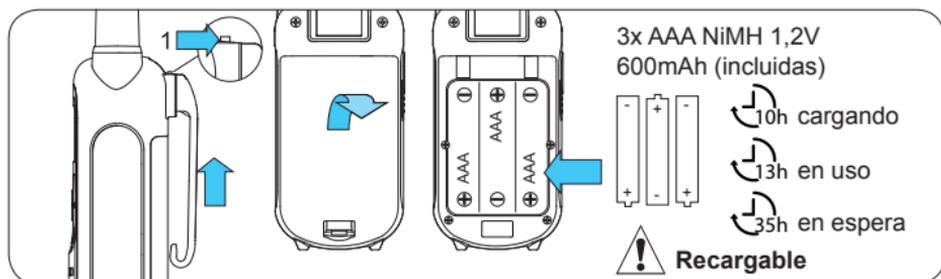


WAKIE035 FR-200

Conjunto de 2 walkie-talkies 16 canales 7km

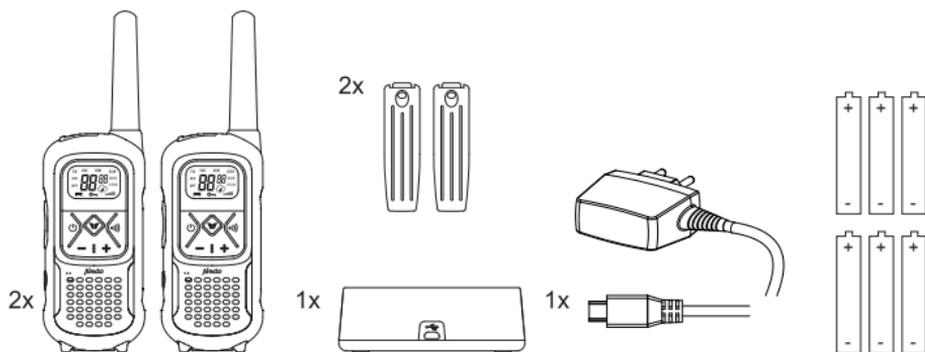

5 Nivel de la batería

= 70-100%
 = 30-70%
 pitido = 0-30%
 pitido = 0%

6 Volumen

7 Seleccionar mismo canal

8 Hablar

hold → PTT

TX

± 5 cm

*PTT= pulsar para hablar




VOICE UNPROTECTED

9 Tono de llamada

Tono de llamada




10 Silenciar (ver términos)

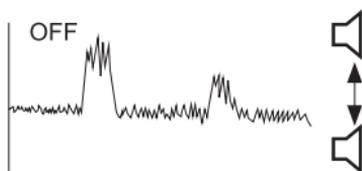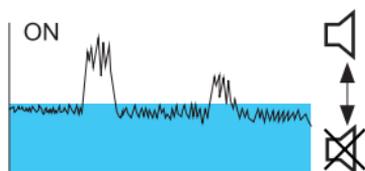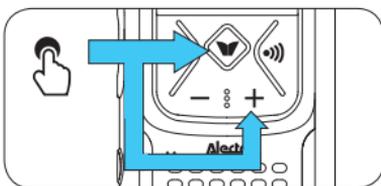

11 Bloquear

on/off



PTT ✓





Call key icon ✗

+ ✗

- ✗

12 Seleccionar canal


1x




OK

- 13** CTCSS
Seleccionar canal (ver términos)


2x 



CTCSS




00 = off




- 14** DCS
Seleccionar canal (ver términos)

3x 



DCS




00 = off




- 15** VOX
Sensibilidad (ver términos)

4x 



VOX




Off = no VOX




- 16** Escanear canales

5x 



SCAN



START SCAN


+/- : SIGUIENTE CANAL




STOP SCAN

17 CTCSS
Escanear

6x



SCAN
CTCS




+/- : SIGUIENTE
CANAL


STOP
SCAN

18 DCS
Escanear

7x



SCAN
DCS





+/- : SIGUIENTE
CANAL

STOP
SCAN

19 Establecer
el tono



8x



OK

20 Tono


9x




OK

21 Tonos de teclas

10x




E0



22 Recibir 2 canales (ver términos)

11x



DCM




*Seleccionar "OFF" para parar la búsqueda de canales

23







6sec






24 Alimentación por cargador

Unidades fuera



25 Carga por cable



DECLARATION OF CONFORMITY

This device complies with the essential requirements and provisions as described in the European Directive 2014/53/EU.

This declaration of conformity is available at: <http://DOC.hesdo.com/FR-200.pdf>

Use only supplied adapter



Input: 100-240V~
50/60Hz 100mA
Output: 5V  550mA
Model: TGE050P055



Frequency Range : 446.00625 - 446.19375 MHz
Maximum Power : < 6,5 dBm

Hesdo bv.
Aziëlaan 12, 5232 BA
's-Hertogenbosch
The Netherlands

www.alecto.com


v1.0